

# UNIBOLT Couplings

## HOW TO ORDER

### ORDER NUMBERS 3000/5000 lb WP, Threaded Only

Size (in.)	Order Number	With SS Seal Ring
1	J091379-001	J091379-002
2	J090189-001	J090189-002
2-1/2	J091380-001	J091380-002
3	J091381-001	J091381-002
4	J091382-001	J091382-002
5*	J091377-001	J091377-002

\* Coupling available for 3000 psi only.

### ORDER NUMBERS 3000/5000 lb WP, 1" to 4" Butt Weld Only

Size (in.)	Schedule	Order Number	With SS Seal Ring
1	SCH 80	J091394-001	J091394-002
	SCH 160	J091397-001	J091397-002
	XXH	J091402-001	J091402-002
2	SCH 40	J091591-001	J091591-002
	SCH 80	J090195-001	J090195-002
	SCH 160	J090194-001	J090194-002
	XXH	J090193-001	J090193-002
2-1/2	SCH 40	J091593-001	J091593-002
	SCH 80	J091395-001	J091395-002
	SCH 160	J091398-001	J091398-002
	XXH	J091403-001	J091403-002
3	SCH 40	J091592-001	J091592-002
	SCH 80	J090237-001	J090237-002
	SCH 160	J090236-001	J090236-002
	XXH	J090235-001	J090235-002
4	SCH 80	J091396-001	J091396-002
	SCH 160	J091399-001	J091399-002
	XXH	J091404-001	J091404-002

### ORDER NUMBERS 3000 lb WP, 5" to 6" Butt Weld Only


Size (in.)	Schedule	Order Number
5	SCH 40	J091389-001
	SCH 80	J091390-001
	SCH 160	J091391-001
	XXH	J091392-001
6	XXH	J090193-001

### ORDER NUMBERS 15,000 lb WP, 2-1/2" Butt Weld Only

Size (in.)	Schedule	Order Number
2-1/2	XXXH	J091589-001
	1.1 ID	J091590-001



3000 lb UNIBOLT BUTT WELD STEEL COUPLING

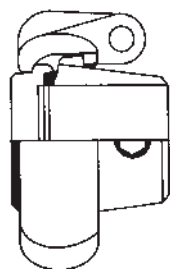

BUTT WELD COUPLING WITH BLIND BLANKING PLUG

### ORDER NUMBERS 5000 lb WP, 5" and 6" Butt Weld Only

Size (in.)	Schedule	Order Number	With SS Seal Ring
5	SCH 160	J091400-001	J091400-002
	XXH	J091405-001	J091405-002
6	SCH 160	J091401-001	J091401-002
	XXH	J091406-001	J091406-002

### ORDER NUMBERS 10,000 lb WP, 2" to 5" Butt Weld Only

Size (in.)	Schedule	Order Number	With SS Seal Ring
2	SCH 160	J091407-001	J091407-002
	XXH	J090200-001	J090200-002
2-1/2	XXXH	J091585-001	J091585-002
	XXH	J091408-001	J091408-002
3	XXH	J091586-001	J091586-002
4	XXH	J091587-001	J091587-002

### PIPE BORE CHART

Nom. Size (in.)	3000 psi SCH 40 Bore	3000 psi SCH 80 Bore	5000 psi SCH 160 Bore	5000 psi SCH XXH Bore
1	-	0.957	0.815	0.599
2	2.067	1.939	1.689	1.503
2-1/2	2.469	2.323	2.125	1.771
3	3.068	2.900	2.626	2.300
4	-	3.826	3.438	3.152

Nom. Size (in.)	3000 psi SCH 40 Bore	3000 psi SCH 80 Bore	3000 psi SCH 160 Bore	3000 psi SCH XXH Bore
5	5.047	4.813	4.313	4.063
6	-	-	-	4.897

Nom. Size (in.)	5000 psi SCH 160 Bore	5000 psi SCH XXH Bore	-	-
5	4.313	4.063	-	-
6	5.189	4.897	-	-


  

Nom. Size (in.)	10,000 psi SCH 160 Bore	10,000 psi SCH XXH Bore	-	-
2	1.689	1.503	-	-
2-1/2	-	1.771	-	-
3	-	2.300	-	-
4	-	3.152	-	-

Nom. Size (in.)	15,000 psi SCH XXXH Bore	15,000 psi 1.1 ID Bore	-	-
2-1/2	1.38	1.10	-	-

\* These sizes require two bolts.

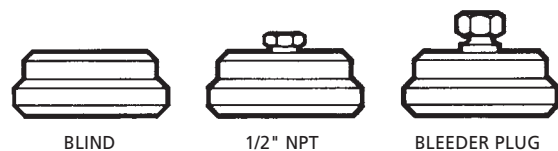

UNIBOLT blanking plugs are interchangeable with plain hubs and are furnished: blind, 1/2" NPT or tapped for bleeder plug. Most sizes available with blanking plug and PLUGLOK instead of plain hub. PLUGLOK safety system is standard when blanking plug ordered. Consult factory for how to order.